

INSTALLATION INSTRUCTIONS

ACCESS PANEL KIT

NASA00101CC, NASA00201CC


NOTE: Read the entire instruction manual before starting the installation.

SAFETY CONSIDERATIONS

Improper installation, adjustment, alteration, service, maintenance, or use can cause explosion, fire, electrical shock or other conditions which may cause death, personal injury or property damage. Consult a qualified installer, service agency, or your distributor or branch for information or assistance. The qualified installer or agency must use factory-authorized kits or accessories when modifying this product. Refer to the individual instructions packaged with the kits or accessories when installing.

Follow all safety codes. Wear safety glasses, protective clothing and work gloves. Use quenching cloths for brazing operations. Have fire extinguisher available. Read these instructions thoroughly and follow all warnings or cautions attached to the unit. Consult local building codes and the current editions of the National Electrical Codes (NEC) NFPA 70.

In Canada, refer to the current editions of the Canadian Electrical Code CSA C22.1.

Recognize safety information. This is the safety-alert symbol . When you see this symbol on the unit and in instructions or manuals, be alert to the potential for personal injury.

Understand the signal words **DANGER**, **WARNING** and **CAUTION**. These words are used with the safety-alert symbol. **DANGER** identifies the most serious hazards which will result in severe personal injury or death. **WARNING** signifies hazards which could result in personal injury or death. **CAUTION** is used to identify unsafe practices, which may result in minor personal injury or product and property damage. **NOTE** is used to highlight suggestions which will result in enhanced installation, reliability, or operation.

WARNING

ELECTRICAL SHOCK HAZARD

Failure to follow this warning could result in personal injury or death.

Before installing, modifying or servicing system, always turn off main power to system. There may be more than one disconnect switch. Lock out and tag switch with a suitable warning label.

CAUTION

CUT HAZARD


Failure to follow this caution may result in personal injury.

Sheet metal parts may have sharp edges or burrs. Use care and wear appropriate protective clothing and gloves when handling parts.

INTRODUCTION

These instructions cover the description and installation of the NASA00101CC and NASA00201CC access panel accessory for the FMU4X, FMU4P, FMC4X, FMC4P, WATC and WAMC Ceiling Fan Coil units.

Figure 1 – Access Panel Dimensions

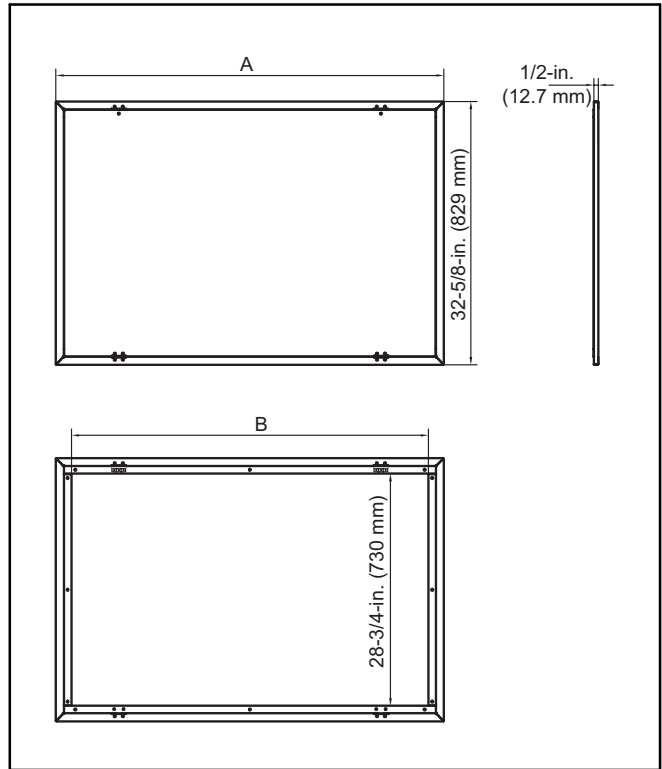

A13269

Panel Dimensions, inches (mm)

For Model	Panel No.	A	B
18/24	NASA00101CC	48(1219)	44-1/4(1124)
30/36	NASA00201CC	60(1524)	56-1/4(1429)

INSTALLATION

1. Cut opening in the ceiling to fit the access panel opening size.
2. Frame around the opening above the ceiling with structural members to bear the weight of the access panel.
3. Remove the screws from the access panel so the access cover hangs from the frame by its hinges.
4. Use screws to secure the access panel frame to the structural framing above the ceiling.
5. Close the access panel and replace the screws that hold the cover to the frame.